


Eyebolt to DIN 580* – EBDIN

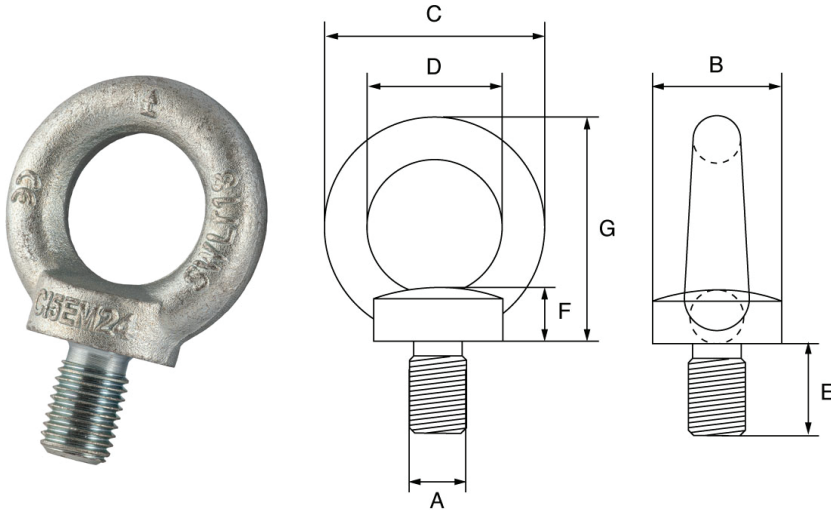

- Mild steel.
- Self coloured and electro galvanised finish.
- Meets the W.L.L. performance requirements of DIN 580.*
- Minimum breaking load is 4 times the W.L.L.
- Marked with CE, W.L.L, material, size and product ID mark.
- For further clarification on reductions for non-axial loading, please consult Manufacturer
- Certification available **2.1 DoC**

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kgs
EBDIN6	0.07	M6	20	36	20	13	6	36	0.05
EBDIN8	0.14	M8	20	36	20	13	6	36	0.07
EBDIN10	0.23	M10	25	45	25	17	8	45	0.11
EBDIN12	0.34	M12	30	54	30	20.5	10	53	0.18
EBDIN14	0.49	M14	35	63	35	27	12	60	0.22
EBDIN16	0.7	M16	35	63	35	27	12	62	0.28
EBDIN18	0.9	M18	40	72	40	30	14	71	0.36
EBDIN20	1.2	M20	40	72	40	30	14	71	0.45
EBDIN22	1.5	M22	45	81	45	35	14	80	0.64
EBDIN24	1.8	M24	50	90	50	36	18	90	0.87
EBDIN27	2.5	M27	50	90	50	36	18	90	1.25
EBDIN30	3.6	M30	65	108	60	45	22	109	1.66
EBDIN33	4.3	M33	65	108	60	45	22	110	2.16
EBDIN36	5.1	M36	75	126	70	54	26	128	2.65
EBDIN39	6.1	M39	75	126	70	54	26	130	3.34
EBDIN42	7	M42	85	144	80	63	30	147	4.03
EBDIN45	8	M45	85	144	80	63	35	150	5.21
EBDIN48	8.6	M48	100	166	90	68	35	168	6.32
EBDIN56	11.5	M56	110	184	100	78	38	187	8.8
EBDIN64	16	M64	120	206	110	90	42	208	12.4